



SWITCHING POWER SUPPLY

WIRING HARNESS

DOC No	FC-RD-XC2	REV	
Date	2016.09.05	UNIT	mm
P/N			


MODEL

Tolerance

CUSTOMER

-10 / +30mm

所有膠殼必須符合UL認證(CCN:RTRT2 or ECBT2 or QMFZ2)

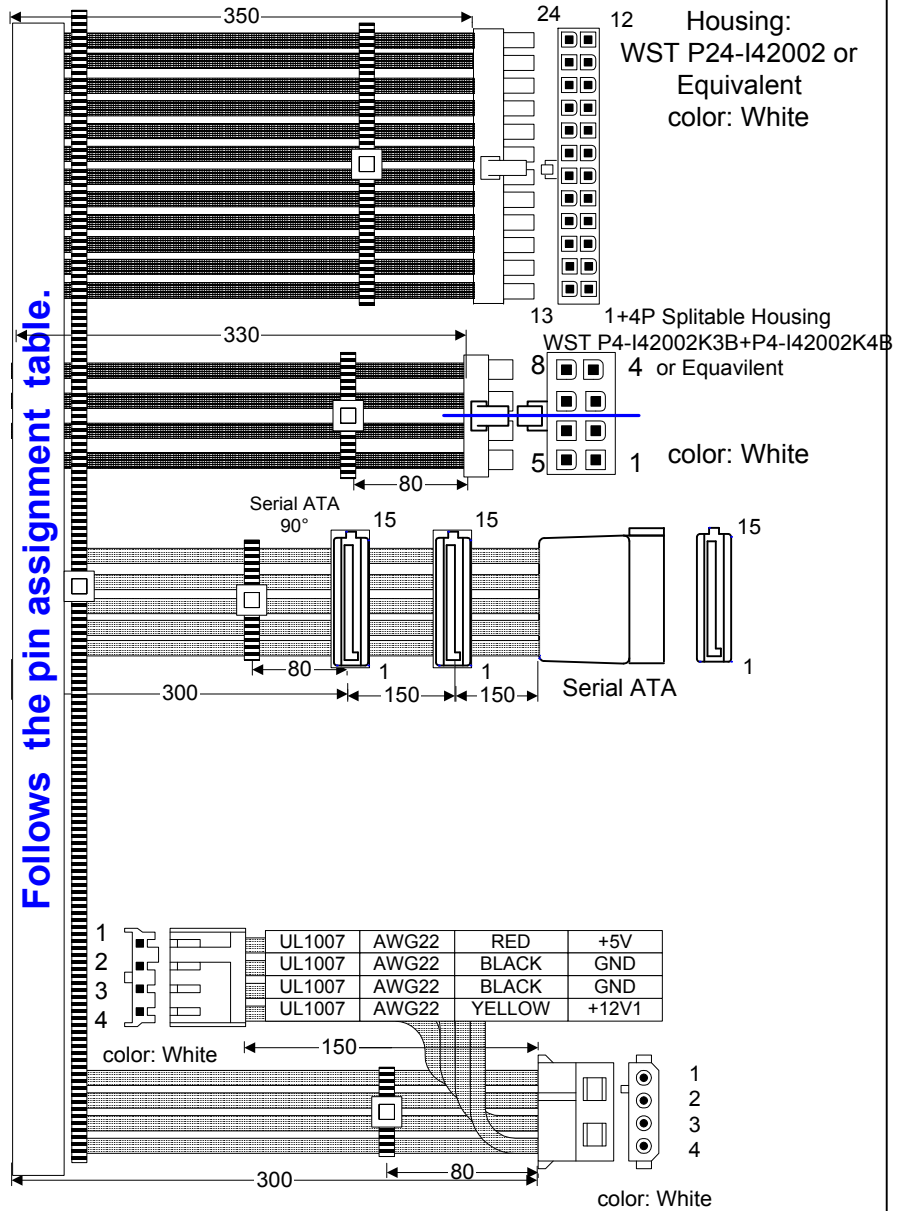

24-4P橙色細線/綠色/灰色/藍色線徑AWG22
24-4P其餘線徑AWG18
4+4P/SATA/大4P線徑AWG18



SWITCHING POWER SUPPLY

WIRING HARNESS

DOC No	FB-SU2-S02	REV	C3
Date	2015.05.26	UNIT	mm
P/N			

MODEL	Tolerance
CUSTOMER	

Pin Assignment

24P					[A]	
1	UL1007	AWG18	BLACK	+5Vsb-G	PA-7	300
2	UL1007	AWG18	YELLOW	+12V	PA-10	300
2	UL1007	AWG18	YELLOW	+12V	PC-13,14,15	650
3	UL1007	AWG18	YELLOW	+12V	PA-11	300
3	UL1007	AWG18	YELLOW	+12V	PD-1	350
4	UL1007	AWG18	BLACK	GND	PA-3	300
4	UL1007	AWG18	BLACK	GND	PA-5	300
5	UL1007	AWG18	BLACK	GND	PA-15	300
5	UL1007	AWG18	BLACK	GND	PA-17	300
6	UL1007	AWG18	BLACK	GND	PA-18	300
6	UL1007	AWG18	BLACK	GND	PA-19	300
7	UL1007	AWG18	BLACK	GND	PA-24	300
8	UL1007	AWG18	RED	+5V	PA-4	300
8	UL1007	AWG18	RED	+5V	PA-6	300
9	UL1007	AWG18	RED	+5V	PA-21	300
9	UL1007	AWG18	RED	+5V	PA-22	300
10	UL1007	AWG18	ORANGE	+3.3V	PA-1	300
10	UL1007	AWG18	ORANGE	+3.3V	PA-2	300
11	UL1007	AWG18	ORANGE	+3.3V	PA-12	300
11	UL1007	AWG18	ORANGE	+3.3V	PA-13	300
12	UL1007	AWG20	BLUE	-12V	PA-14	300
13	UL1007	AWG18	PURPLE	+5Vsb	PA-9	300
14	UL1007	AWG18	YELLOW	+12V	PB-8	380
14	UL1007	AWG18	YELLOW	+12V	PB-7	380
15	UL1007	AWG18	YELLOW	+12V	PB-6	380
15	UL1007	AWG18	YELLOW	+12V	PB-5	380
16	UL1007	AWG18	BLACK	GND	PB-4	380
16	UL1007	AWG18	BLACK	GND	PB-3	380
17	UL1007	AWG18	BLACK	GND	PB-2	380
17	UL1007	AWG18	BLACK	GND	PB-1	380
18	UL1007	AWG18	BLACK	GND	PC-10,11,12	650
18	UL1007	AWG18	BLACK	GND	PC-4,5,6	650
19	UL1007	AWG18	BLACK	GND	PD-2	350
19	UL1007	AWG18	BLACK	GND	PD-3	350
20	UL1007	AWG18	RED	+5V	PA-23	300
20	UL1007	AWG18	RED	+5V	PC-7,8,9	650
21	UL1007	AWG18	RED	+5V	PD-4	350
22	UL1007	AWG18	ORANGE	+3.3V	PC-1,2,3	650
23	UL1007	AWG20	GREEN	DC-ON	PA-16	300
24	UL1007	AWG20	GRAY	P.G	PA-8	300

PA-20 NC

2015.3.31 補PA-23打線位置為24P pin20,24P膠殼改為JS-1149-24HK(黑色),料號改為B版.